



AmphiKing 6450

Optional Equipment Includes...

SURF, TURF AND IN BETWEEN

This
multi-functional
amphibious boat
works on land,
water and
swampy areas.



Small Auger Dredge

Weed Grapple

Sludge Pump



Front Collecting Rake

Clamshell Bucket

T-Cutting Bar

Excavation Bucket

Robust, Powerful, Flexible—Perfect for a variety of jobs, including water maintenance, construction and disaster control

Low Ground Pressure on Tracks—Ideal for land use

Powerful Auger Drives—Works well in swampy areas

Front-mounted Articulating Boom—With quick-connect high performance hydraulics for the job needed

Quick Change System—Can work with a variety of tools

Affordable Financing—Easy financing options available

FACTORY DIRECT—No middle-person markups save time and money

West Palm Beach, Florida

weedooboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!



AmphiKing 6450

SPEC SHEET



STANDARD EQUIPMENT

- Bilge pump
- 12V - socket in the cockpit
- Battery main switch
- Emergency shut-off valve for diesel fuel
- Manual oil change pump
- Driver's seat features armrests with pilot controls
- Kubota 4-cyl diesel engine
- Rudder angle indicator



WORKING TOOLS


- T-Cutting Unit
- Lateral cutting bar
- Dredge Pump/Dredge Auger 1.5m (4'11")
- Clamshell bucket
- Weed grabber
- Weed bucket
- Mowing bucket
- Excavating bucket
- Tree cutter
- Hydraulic jackhammer

Other working tools available upon request



TECHNICAL SPECIFICATIONS

Engine	4 cylinder diesel, 55kW/75HP at 2200 RPM
Battery	12V, 88 Ah, electrical control system
Diesel Fuel Tank	16 gal. (60 l)
L/W/H (overall)	Approx 19'8" (6 m)/7'9" (2.35 m)/6'7" (2 m)
L/W/H (hull)	12'6" (3.8 m)/4'1" (1.25 m)/4'8" (1 m)
Draft	Approx 21'5" (80 cm)
Ground Clearance	Approx 16" (40 cm)
Propulsion in water	Hydraulic weed-free augers with adjustable depth and tilt
Driving on land	Tracks fitted around pontoons
Speed	Variable up to 3.75 mph (6 km/h) on water & land
Working boom	7'10" (2.4 m) reach and 180° swing radius with quick-change system

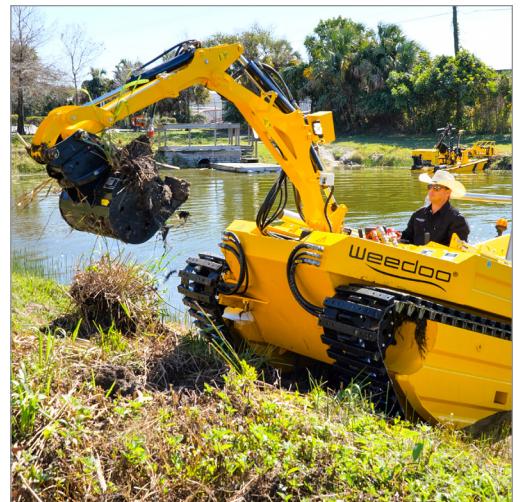

West Palm Beach, Florida

weedooboats.com • 561-204-5765

Nothing Cleans Waterways Better Than Weedoo!

